


# NLR High Stability Chiller (NLR-HSC-M1)

## PRODUCTS & SERVICES

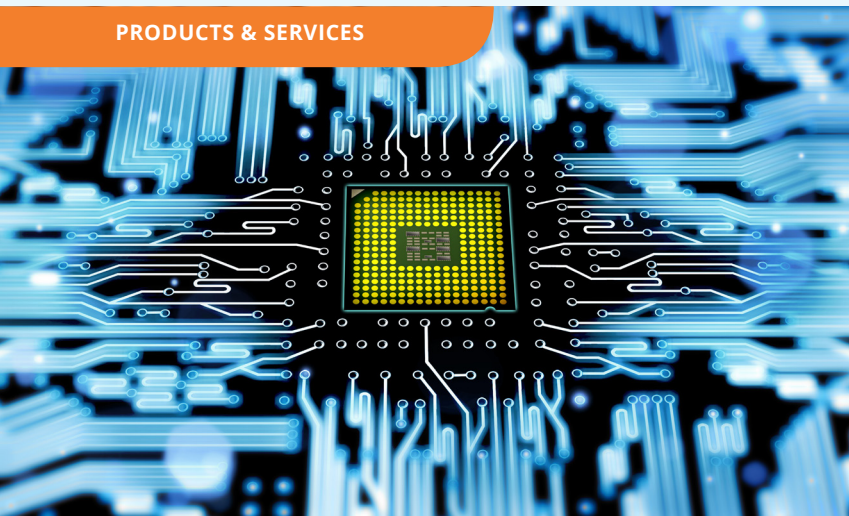


Temperature stability	±0.0005°C
Operating temperature	5°C to 70°C
Pump flow rate	Variable flow rate, max 80 lpm at 1.2 bar pressure difference
Cooling capacity	~800W
Heating capacity	~1500W
Chilled water maximum pressure	10 bar
Chilled water inlet/outlet	1.5 inch Swagelok fittings
Dimensions (W x L x H):	650 mm x 1250 mm x 1400 mm
Chiller control	National Instruments (NI) real time PXI system
Number of external NTC temperature sensors	Up to 27
EMC compliance	compliant with IEC 61000-6-3 and IEC 61000-6-4 emissions standard for both conducted and radiated emission
Cooling of Peltier units	Process Cooling Water (PCW) or a regular thermostat bath


## APPLICATION

The NLR High stability chiller is a circulation cooler intended for applications where an extremely stable thermal environment is required. The chiller can deliver up to 80 litres/minute of water with a temperature stability of ±0.0005°C. The water pressure variations and noise levels are very low. This makes the chillers very suitable for applications where vibrations should be minimized, such as optical tables and lithography equipment.

## TECHNOLOGY

The low water pressure variations and noise levels are realised by applying Peltier coolers instead of the more common compressor technology, and the use of a multistage water pump. The chiller can be remotely controlled via a browser on any PC connected to the same network as the chiller. Up to 27 external NTC temperature sensors can be connected to the system.

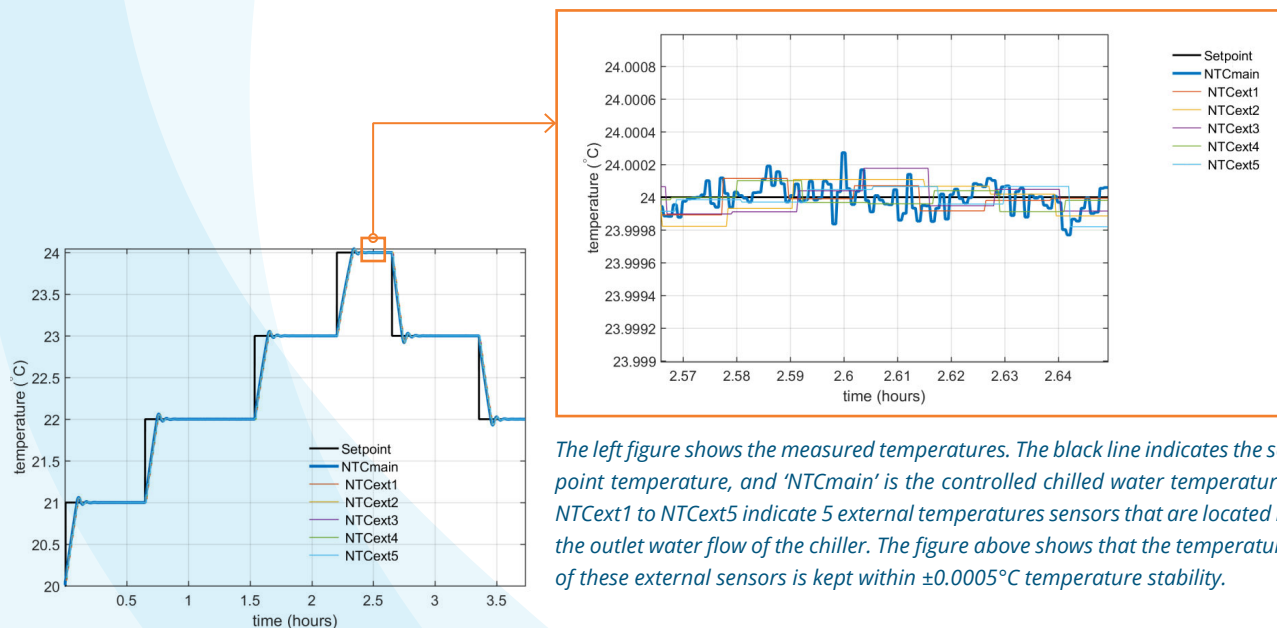

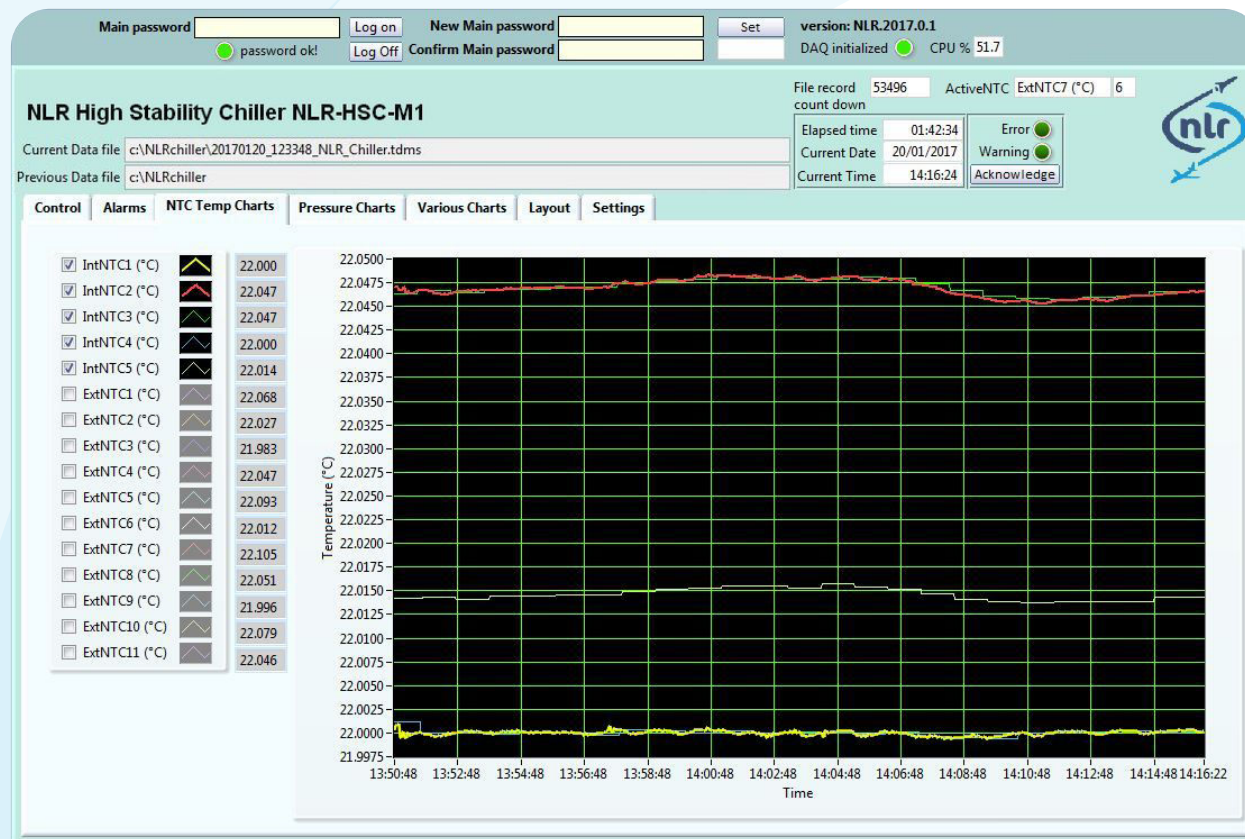

The Graphical Users Interface (GUI) can be opened in a browser on any PC that is connected to the same network as the chiller. The GUI contains displays for all the measured values (temperatures, pressures, volume flow) and is used to control the system. The measured data is automatically stored.

#### PROPERTIES

- Extreme temperature stability
- Minimal vibration
- Very low noise level
- Remote operation via web interface
- up to 80 litres/minute
- Cooling capacity 0.8 kW

#### OPTIONS

- Assembly in ISO 8 clean room
- More external sensors
- Customising of the specifications

**AEROSPACE SYSTEMS DIVISION**  
Aerospace Electronics & Qualification

☎ +31 88 511 46 28  
✉ thermalcontrol@nlr.nl